

Integrated LED Recessed Fixture

[]]

11

STKD44KW4 X4

- Integrated LED.
- Compact and flexible fixture designed for ceiling clearance of 1 ¼" (32 mm) and more.

[]

11

- Insulated ceiling rated for direct contact with insulation
- Suitable for damp locations.
- Dimmable (compatible with most dimmers).

Lighting source

	Power	8W ~ 120V
	Brightness	650 Lumens
	Color	4000K
	Lifespan	25 000 hrs

Dimensions

4 ¾ in.

12 cm

1.3 cm

4 ¼ in.

10.8 cm


½ in.

clearance	Finish		
ulation.		Trim	Matte White

Trim Diameter

Cutout Diameter

Trim Height

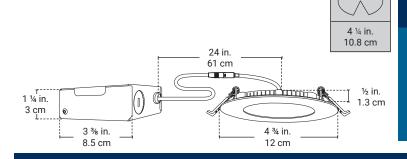

daniel.goulet@bazz.ca

6000 Boulevard Thimens Saint-Laurent, Qc Canada, H4S 1S5 1.800.931.4470 www.bazz.ca

i i i i i i i i

